

FIG. 1

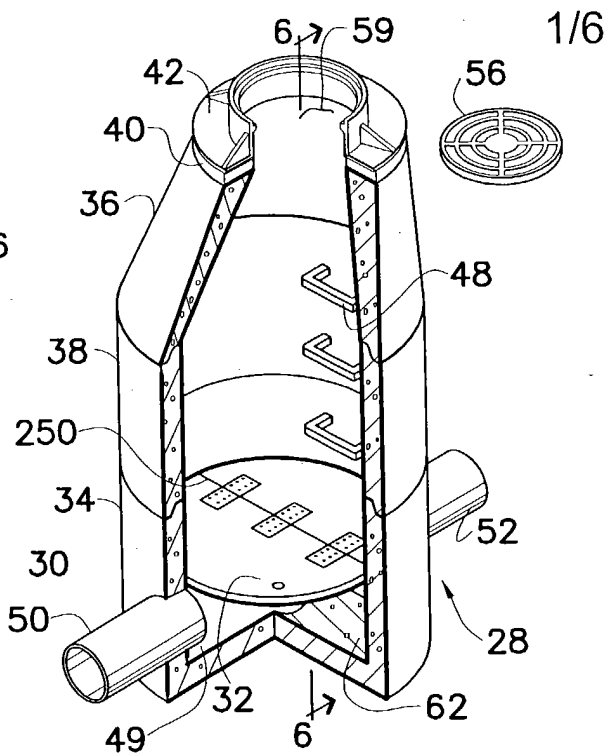


FIG. 2

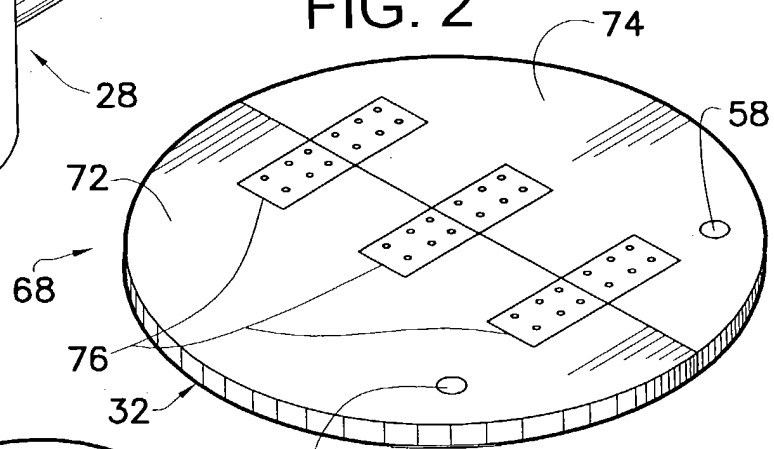


FIG. 3

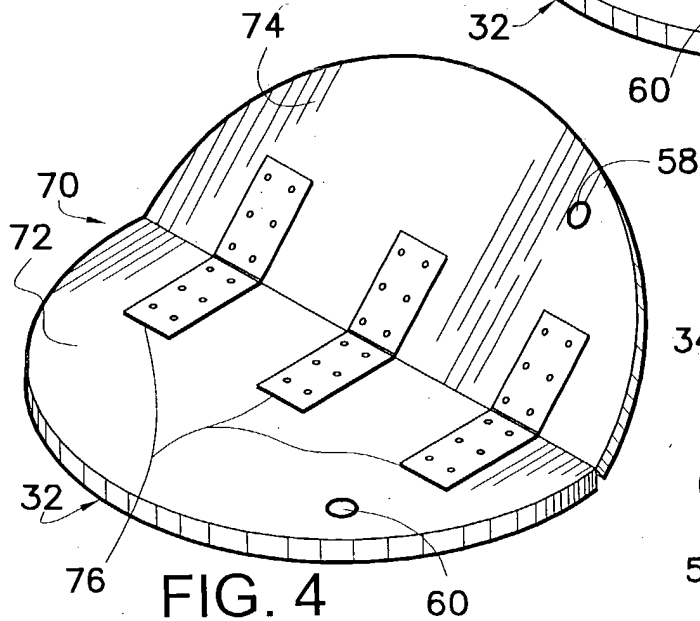


FIG. 4

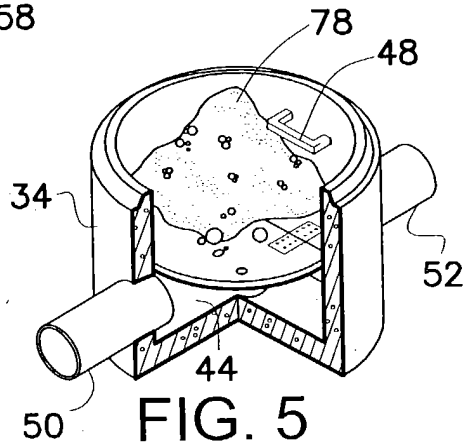


FIG. 5

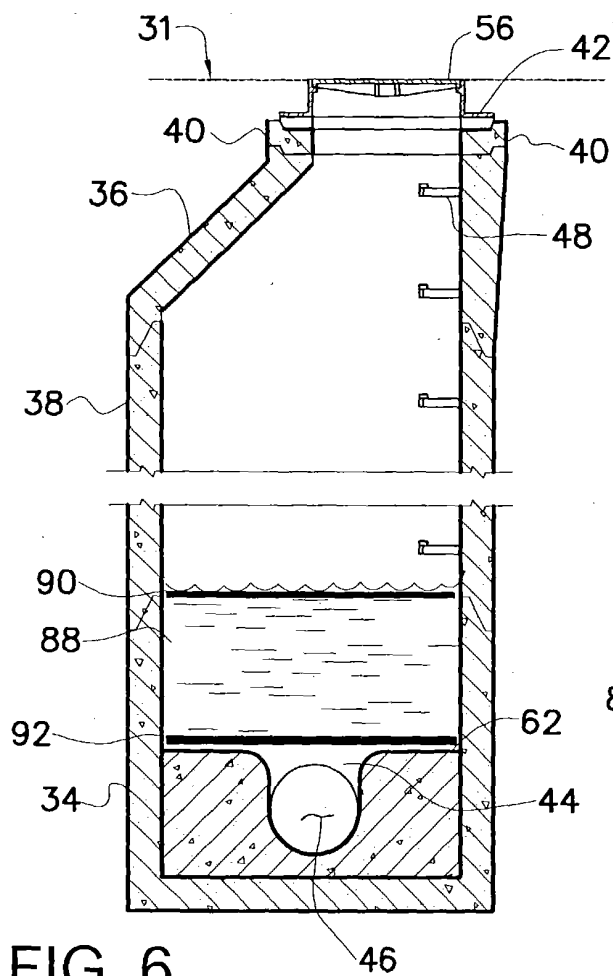


FIG. 6

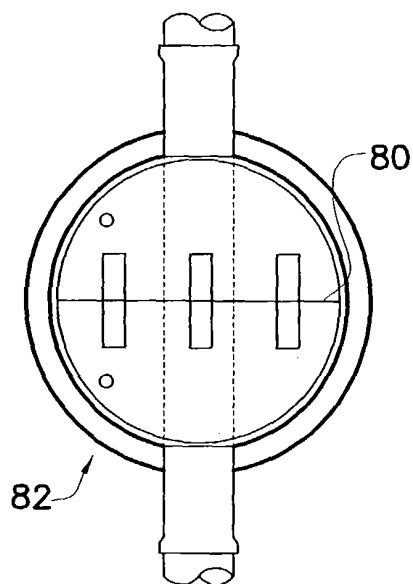


FIG. 7

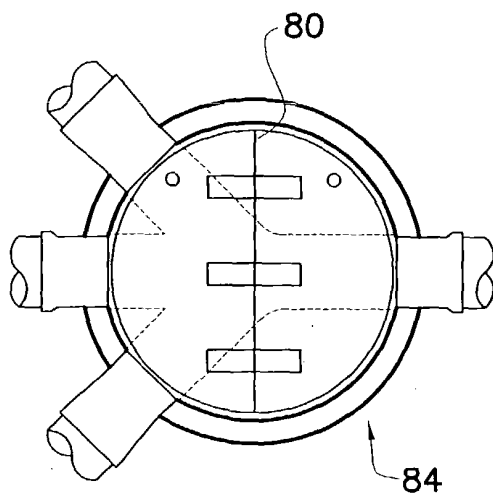


FIG. 8

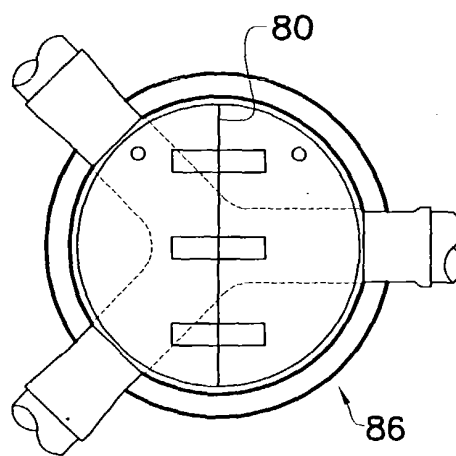


FIG. 9

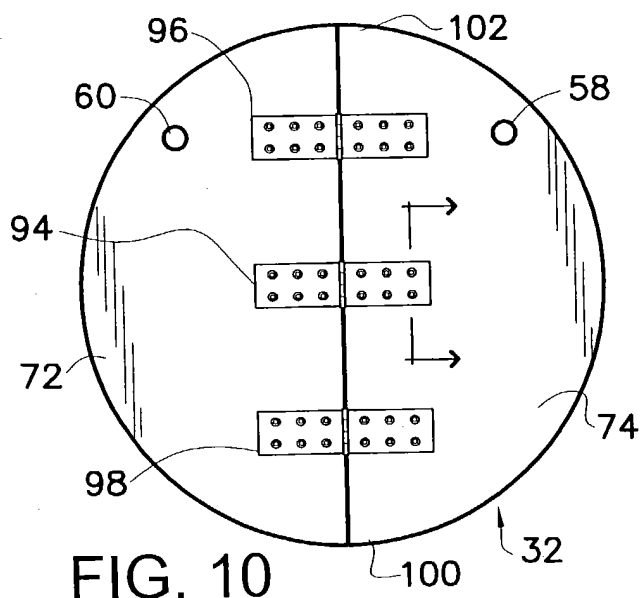


FIG. 10

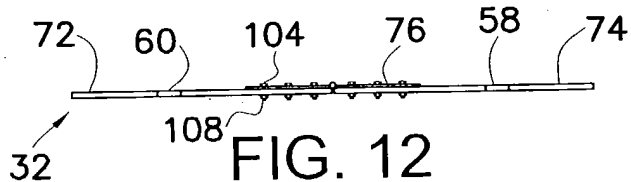


FIG. 12

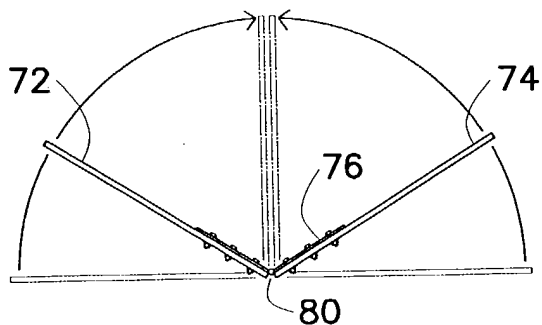


FIG. 13

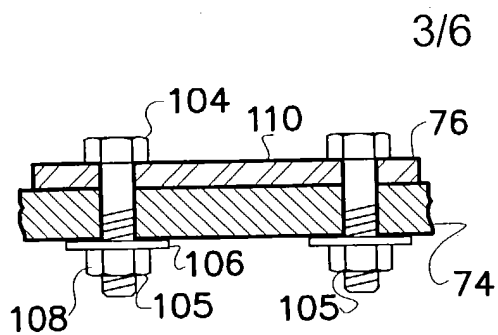


FIG. 11

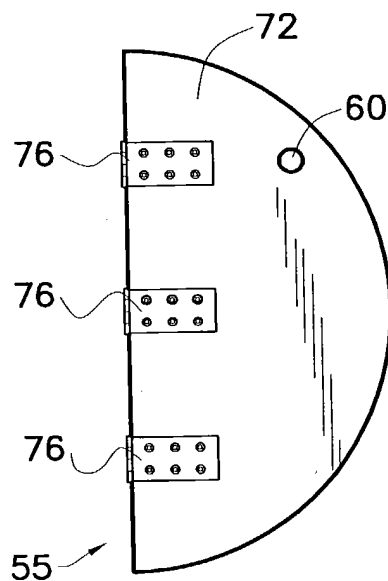


FIG. 14

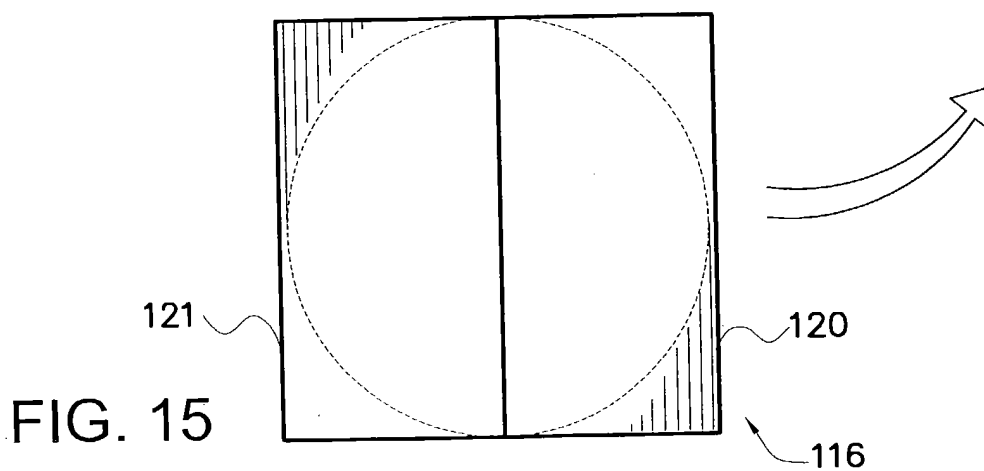


FIG. 15

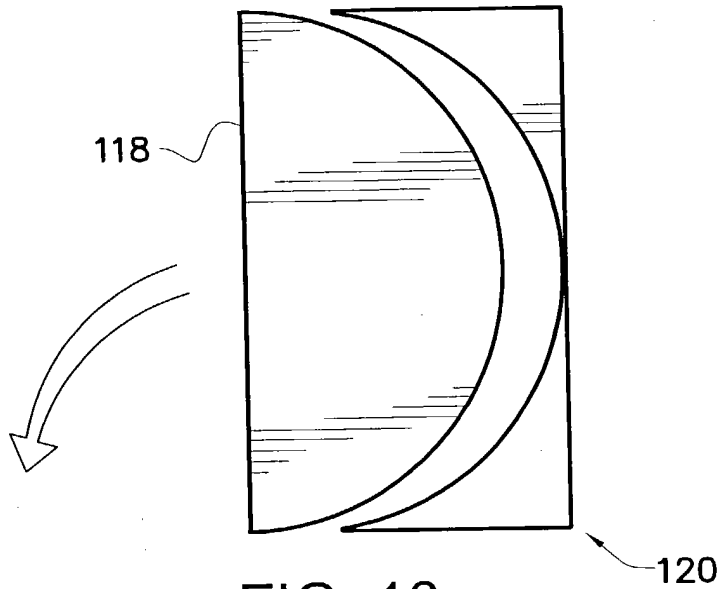


FIG. 16

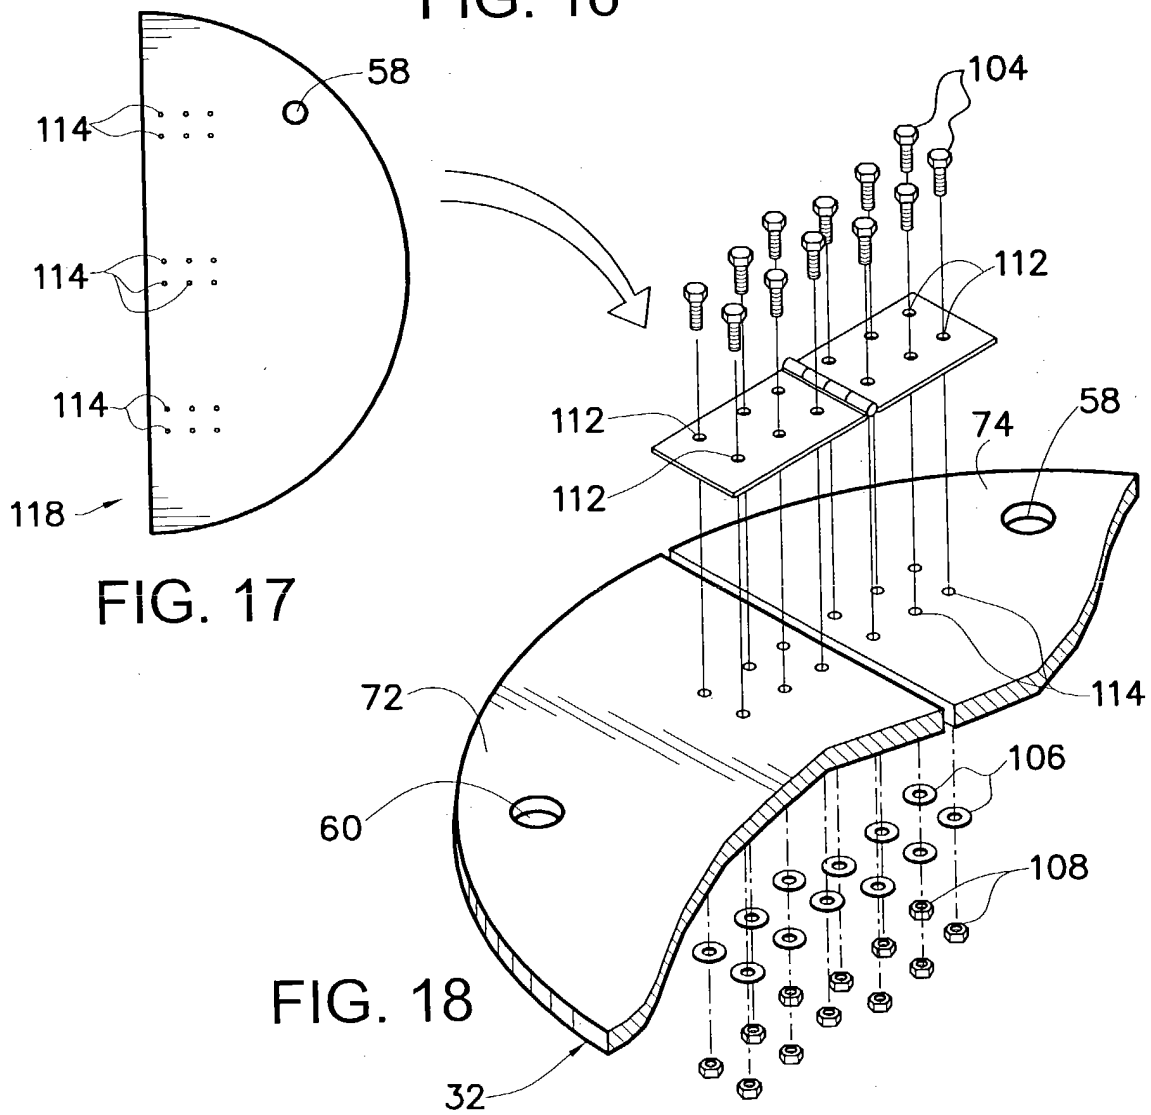


FIG. 17

FIG. 18

FIG. 20

Fig. 1 is a perspective view of a first embodiment of a device. It shows a vertical rod (206) passing through a horizontal plate (208). The rod is secured by a nut and washer assembly at the bottom. The plate has a central hole and a rectangular cutout on its top surface.

FIG. 10 is a perspective view of a second embodiment of the device. It shows two rectangular blocks, 218 and 216, joined by a curved member 210. The member 210 is secured to the blocks by fasteners 204.

FIG. 22

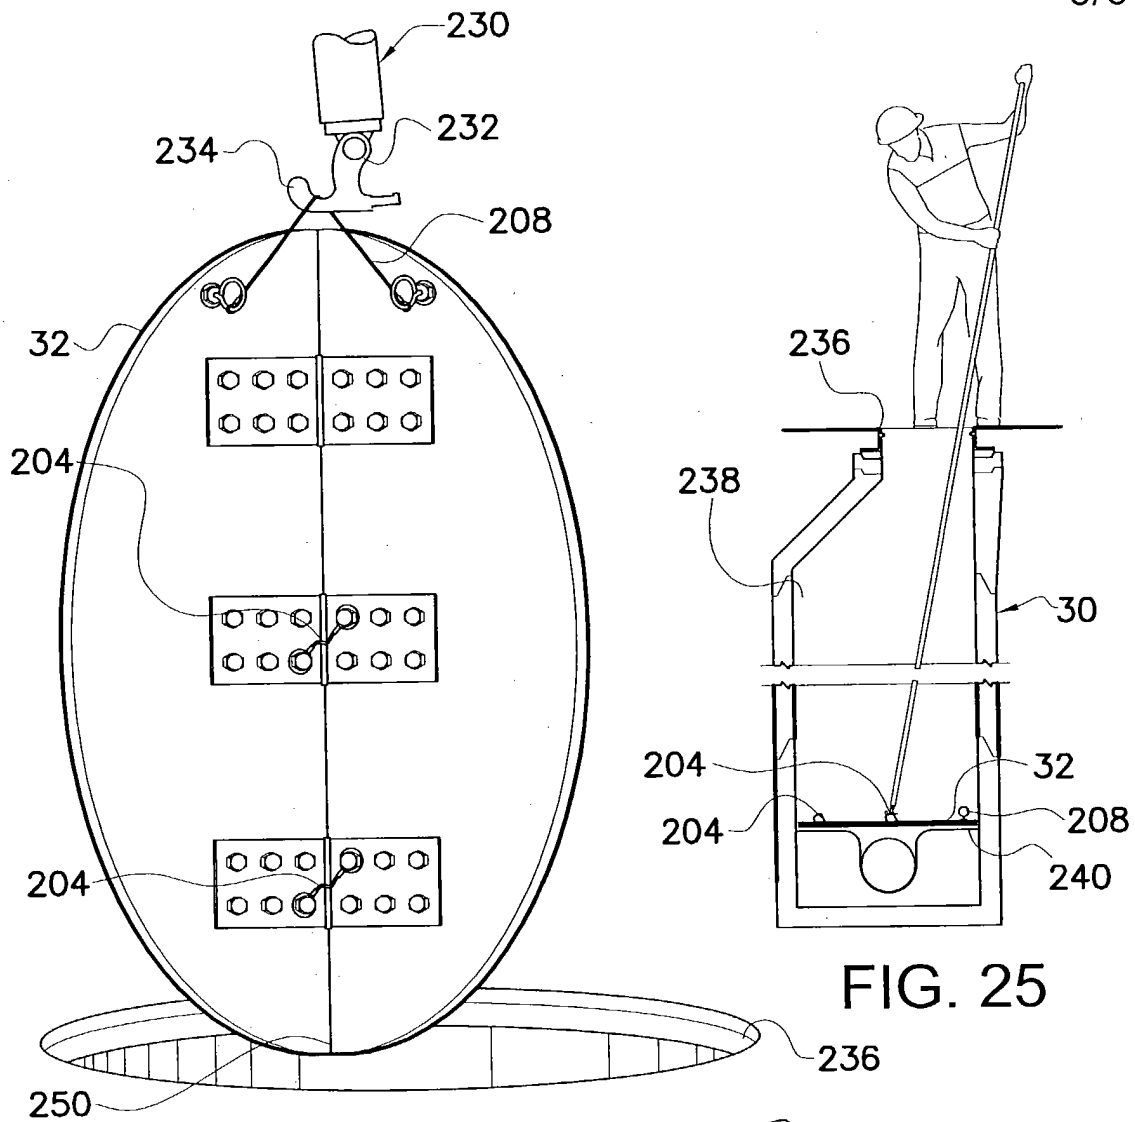


FIG. 25

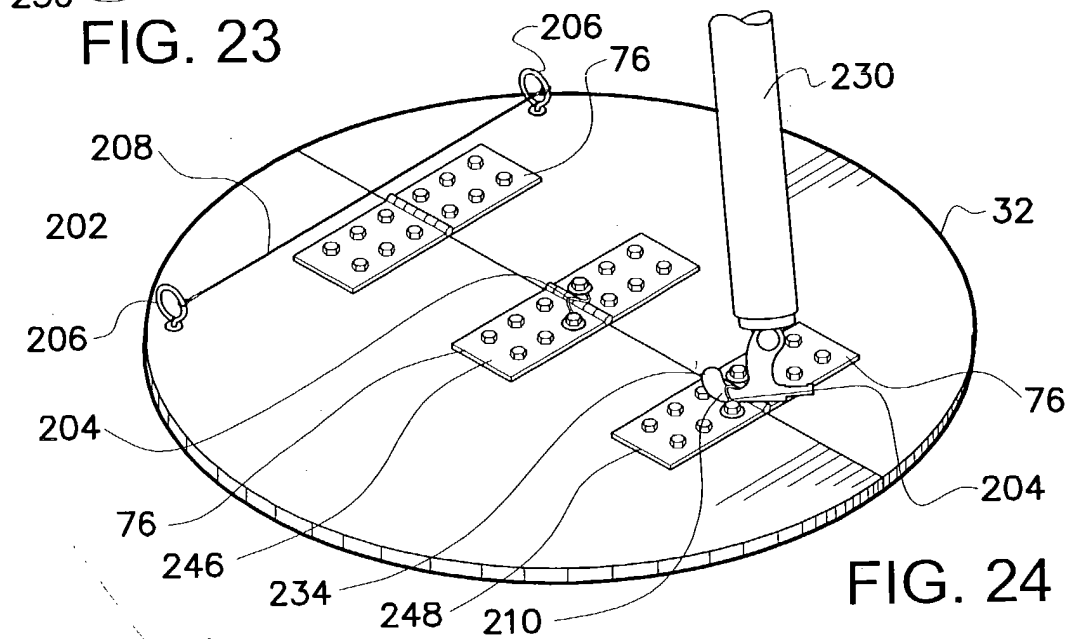


FIG. 24